

24S2 100 W Power Supply

Dimmable/non-dimmable damp/dry-rated 100 Watt power supplies

24
VDC

24S2
Non-dimming




24S2D
Dimming


- Universal input voltage – 108-240 VAC (277 VAC North America only), 50-60 Hz
- Constant voltage output at 24 V and 96 W
- Auto-resetting – No fuses to replace or circuit breaker to reset – Short circuit protection automatically resets when short condition is corrected
- 3-Way dimming controls (0-10 V, PWM, resistance), PWM dimming output (701895-24S2D only)
- Simple secondary hook-ups – No minimum load or load balancing required
- 5-year product and limited labor warranty
- Rugged and compact

Wiring diagram

701895-24S2

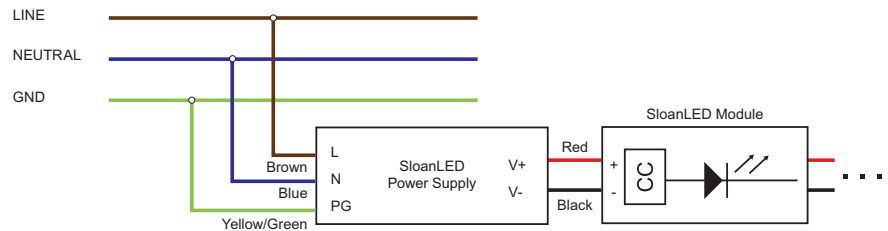

701895-24S2D

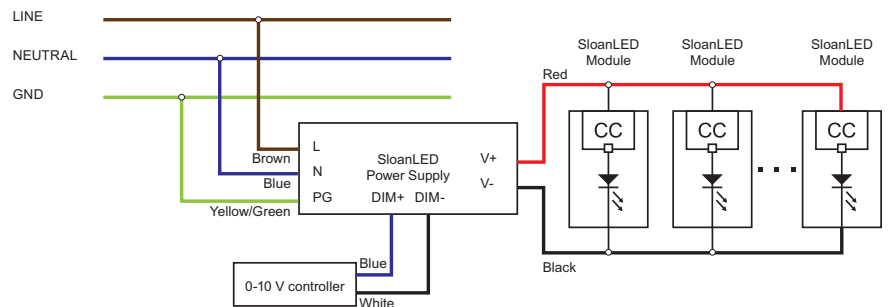

In the end application, the maximum case temperature (T_c) shall not be exceeded 90° C.
The product is intended for dry and damp environment.



24S2 100 W Power Supply

Dimmable/non-dimmable damp/dry-rated 100 Watt power supplies

24
VDC

Specifications

Part number.....701895-24S2 (Non-dimmable)
701895-24S2D (Dimmable)

INPUT

Rated input voltage 108-240 VAC, 277 VAC (North America only)
Max. input voltage **24S2** 108-240 VAC
24S2D 108-305 VAC
Frequency 50-60 Hz
Rated input current 1.2 A max.
Inrush current <80 A max. @ 277 VAC, 60 Hz
Efficiency **24S2** >85% minimum @ 120 VAC (full-load)
24S2D >87% @ 120 VAC
>89% @ 240 VAC
>89% @ 277 VAC
Power factor **24S2** >0.90 @ 120-277 VAC (full-load)
24S2D >0.95 @ 120-277 VAC (full-load)
>0.90 @ 277 VAC (65% load)
THD <20% @ 120-277 VAC (full-load)
<20% @ 277 VAC (65% load)

OUTPUT

Rated output voltage 24 VDC
Rated output current 4 ADC
Max. output power 96 W
Line regulation < 1%
Load regulation < 3%

PROTECTION

Over current Yes, auto-recovery
Over temperature Yes, 100° C to 110° C case, auto-recovery
Short circuit Yes, auto-recovery
Surge immunity Line – Earth → 4 kV
Line – Neutral → 2 kV

DIMMING (701895-24S2D only)

Dimming method 0-10 V, PWM and resistor
Min. dimming level 1%
Current consumption 0.1 mA sourcing

ENVIRONMENT

Operating ambient temp. -40° C to +60° C, derated up to 65° C with 50% of load
Maximum case temp. 90° C
Storage temp. -40° C to +85° C
IP rating IP54, dry and damp locations only
Lifetime 25,000 hours @ +60° C ambient with 100 % load

COMPLIANCE

Safety standard UL879 Class 2, UL879A, CE
(EN61347-2-13:2014, EN61347-1:2008)
EMI standard FCC part 15 Class B, EN55015
Harmonic current emission IEC/EN61000-3-2 Class C
Surge IEC/EN61000-4-5

24S2 100 W Power Supply


Dimmable/non-dimmable damp/dry-rated 100 Watt power supplies

24
VDC


Efficiency

701895-24S2

Efficiency vs various loads @ 120 VAC

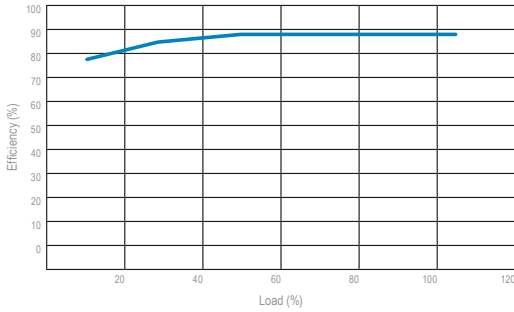


Efficiency vs various loads @ 240 VAC

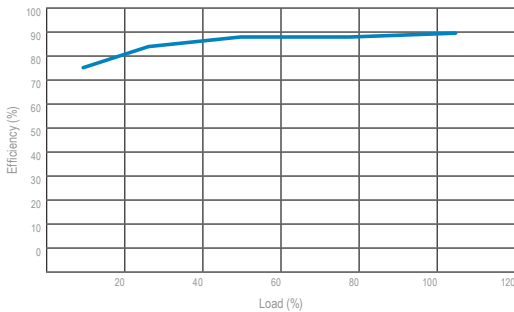


701895-24S2D

Efficiency vs various loads @ 120 VAC

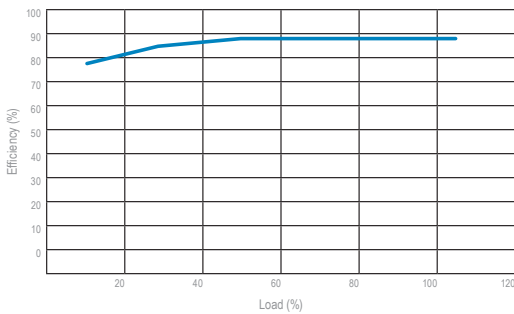


Efficiency vs various loads @ 240 VAC

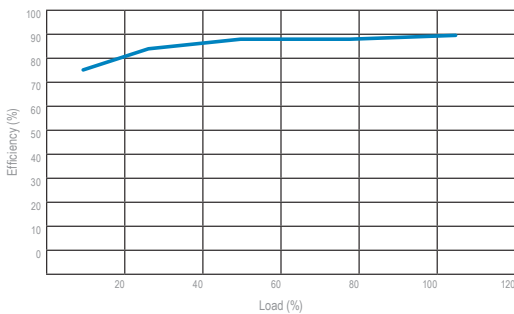


Dimming

701895-24S2D only


Dimming chart (0-10 V dimming)

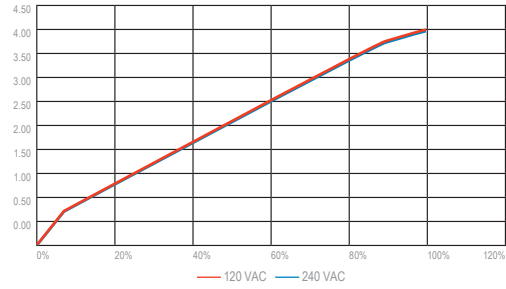

Dimming chart (PWM dimming)

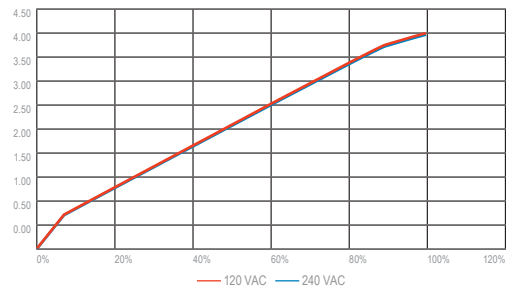

Dimming chart (Resistor dimming)

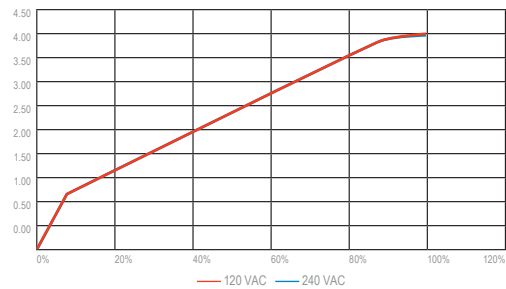

24S2 100 W Power Supply


24
VDC

Dimmable/non-dimmable damp/dry-rated 100 Watt power supplies


Dimensions

Weight: 1.17 lbs (0.53 kg)

701895-24S2

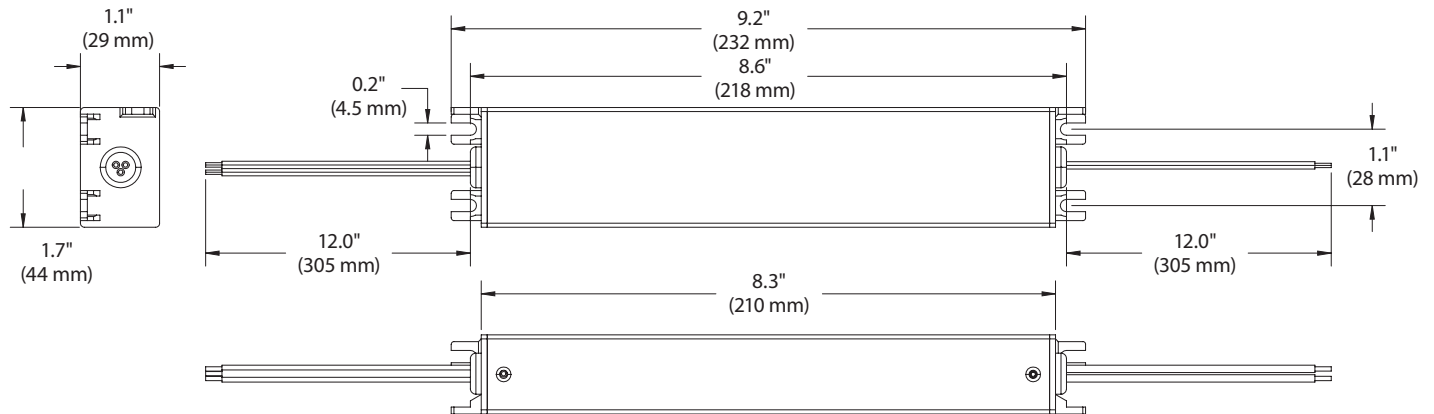

701895-24S2D

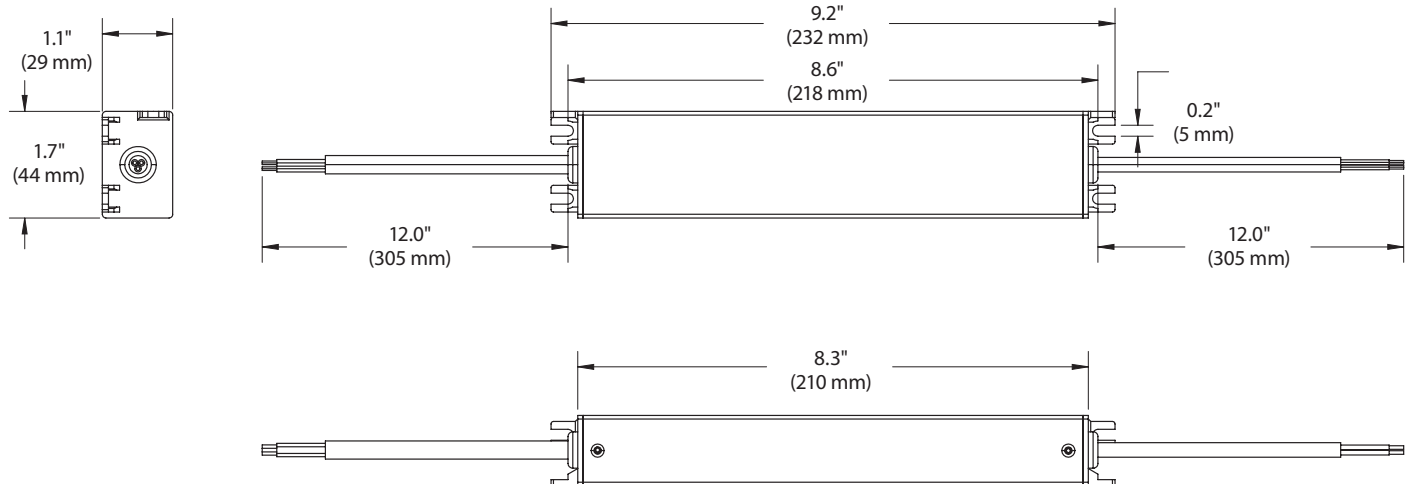

SloanLED Headquarters

5725 Olivas Park Drive, Ventura, CA, USA
805.676.3200 • info@SloanLED.com

SloanLED Europe b.v.

Argonstraat 110, 2718 SN Zoetermeer, NL
+31 88 12 44 900 • europe@SloanLED.com



SloanLED.com

Specifications subject to change without notice.
© 2021 SloanLED Rev B 2021-06-09



Visit product page
for details.

Specifications subject to change without notice.

