


SloanLED LEDBlade

LED canopy fascia and wall wash fixture

Specifications

Part number	701994-6WA5X1
Dimensions L × W × H	58.6" × 1.0" × 1.0"
LEDs per assembly	72
Operating temperature	-40° C to +70° C
Life rating	L ₇₀ @ >60,000 hours
Power per assembly	30 W
Optional dimming	PWM (Pulse width modulation, SloanLED Universal LED Wireless Dimmer 601115)
Efficacy	120 lm/W
Ingress protection	IP66
UL location rating	Dry, damp, and wet
Fastening	Mounting clips
Packaging	Twelve (12) assemblies per box
Color temperature	6500 K
Lumens per assembly	3,118

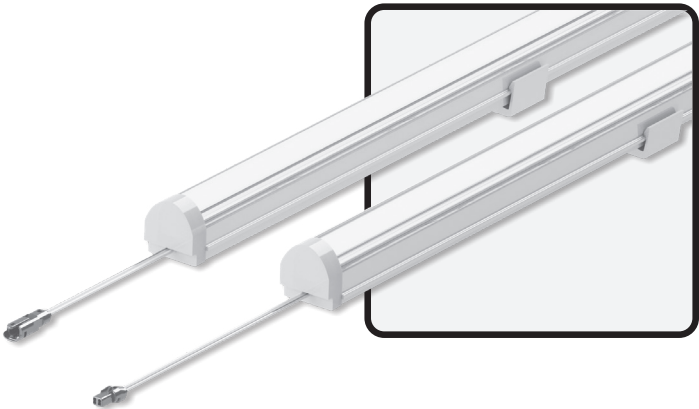


Power Supply Capacity

24 VDC power supply	Loading
60 W Power Supply	One (1), 5-ft SloanLED LEDBlade section
100 W Power Supply	Three (3), 5-ft SloanLED LEDBlade sections
300 W Power Supply	3 × three (3), 5-ft SloanLED LEDBlade sections
Power used per foot in Watts	5.31 W



Accessories

Accessory	Part number	Description	
Cables and connectors			
	701158-120-DC & 701158-180	701187-DC	701188-DC
			
Hook-up cable, 10-ft	701158-120-DC	Connects LEDBlade to power supply	
Hook-up cable, 15-ft	701158-180		
Wiring pigtail, large connector	701187-DC	Male, outdoor-rated connector	
Wiring pigtail, small connector	701188-DC	Female, outdoor-rated connector	
Mounting			
	402453	402494	701491
			
Mounting clip	402453	For mounting product to surfaces	
Field end cap	402494	For adjusting product length	
Field end cap installation kit	701491	Glue, PCB sealer, de-burr sandpaper, instructions	

SloanLED Headquarters
3490 Venture Dr., San Angelo, TX, USA
325 227 4577 • info@SloanLED.com

SloanLED Europe b.v.
Argonstraat 110, 2718 SN Zoetermeer, NL
+31 88 12 44 900 • europe@SloanLED.com



SloanLED.com



Visit product page
for details.