

Elegant. Efficient. Extraordinary.

One of the most efficient canopy lights on the market

Beyond the edge of the ordinary lies the extraordinary!
EdgeView Canopy Luminaire delivers unparalleled value
and efficiency to refueling station canopies with its slim,
lightweight design for fast, easy, one-person installation,
excellent thermal management, and lower energy
consumption than competing fixtures.

- Unique design directs attention to station by delivering bright, uniform illumination to the forecourt using light from the canopy
- Fast, easy, one-person installation
- Slim form factor for a recessed look under canopy
- Faster ROI, lower energy cost, and virtually maintenance free
- 5-year limited warranty

Lightweight design for easy installation (1 kg)



Slim, lightweight design

Slim, lightweight design for fast, one-person installation in new or retrofit applications.



Low energy consumption

125 lm/W efficacy for lower energy consumption and a smaller carbon footprint.



Thermal management

Exceeds expectations in warmer climates with excellent cooling features.



Ingress protection

IP66-rated to protect your investment against rain and water splash.



Peace of mind.


For 67 years, SloanLED has delivered high-efficiency, long-lasting lighting solutions that represent significant energy and maintenance cost savings, easy installation, faster ROI, exceptional performance, and reliability.

Turn it on. Leave it on.

EdgeView Canopy Luminaire is tested to run 100,000 hours when used 24 hours a day, seven days a week, and offers excellent efficiency delivering 125 lumens per watt for superior energy savings!

Designed to Dazzle.

EdgeView Canopy Luminaire's unique design delivers bright, uniform illumination to the forecourt using light from the canopy creating a safe, welcoming space that invites customers and increases revenue.

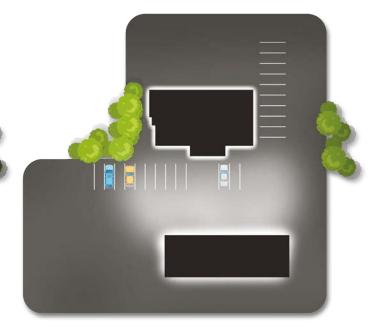

EdgeView Canopy Luminaire

Specifications

Electrical

Input voltage 100-277 VAC, 50-60 Hz

Wattage 100 W

Efficacy 125 lm/W

Lighting

Color temperature (CCT)5000 K

Color rendering (CRI)>80

Performance

Operating temperature.....-40°C to +50°C

Ingress protection IP66

Life ratingL₇₀ @ >60,000 hours

Construction

Housing White powder coated aluminum

Lens Diffused polycarbonate


Documentation

Warranty......5-year limited

Agency listings......CE, UKCA, RCM, RoHS



Dimensions



SloanLED Europe b.v.

Argonstraat 110, 2718 SN Zoetermeer, NL +31 88 12 44 900 • europe@SloanLED.com

SloanLED Headquarters

3490 Venture Dr., San Angelo, TX, USA 325 227 4577 • info@SloanLED.com

















